


## Parker Seals | Parker KR piston seal



Materials: P5062 / NB078  
Pressure max. 300 bar.  
Working Temp.: -35 +110 °C.  
Max. speed 0.5 m/sec.

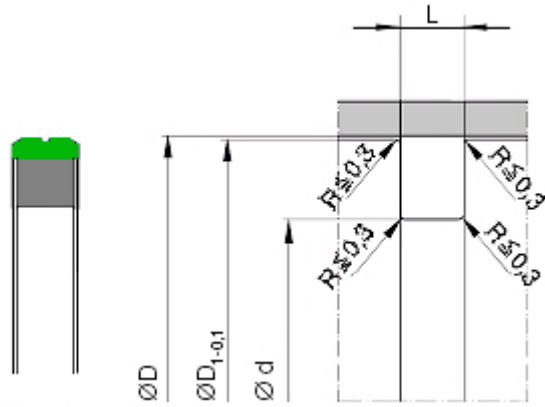

## SEAT

D H9 bore	d h9	DIMENSIONS ISO 7425/1			code
		L +0.2	D <sub>1</sub>		
20	12.5	3.2	19.7	KR 0020 00701	
25	17.5	3.2	24.7	KR 0025 00701	
32	24.5	3.2	31.7	KR 0032 00701	
40	29	4.2	39.7	KR 0040 00701	
50	39	4.2	49.7	KR 0050 00701	
60	49	4.2	59.7	KR 0060 00701	
63	52	4.2	62.7	KR 0063 00701	
70	59	4.2	69.7	KR 0070 00701	
80	64.5	6.3	79.6	KR 0080 00701	
90	74.5	6.3	89.6	KR 0090 00701	
100	84.5	6.3	99.6	KR 0100 00701	
125	109.5	6.3	124.6	KR 0125 00701	
140	119	8.1	139.5	KR 2140 00701	
160	139	8.1	159.5	KR 0160 00701	
180	159	8.1	179.5	KR 0180 00701	
200	179	8.1	199.5	KR 0200 00701	