


Parker Seals |Parker C2 piston seal

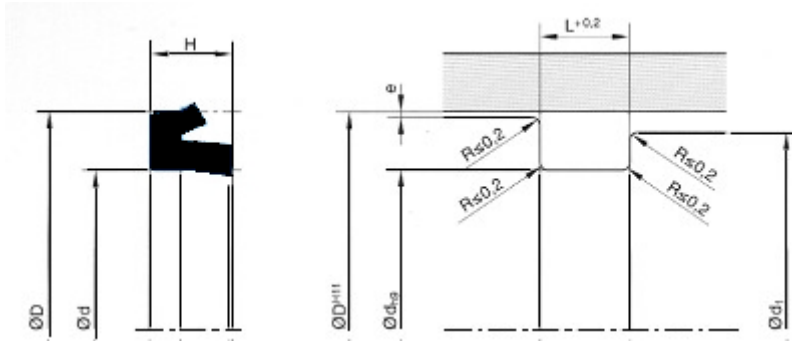

Material: N3584

Pressure max. 160 bar. hydraulics

Pressione max. 16 bar. pneumatics

Working Temp. : -25 +100 °C. hydraulics

WorkingTemp. : -25 +80 °C. pneumatics

Max. speed 0.5 m/sec.



SEAT

| D H11 cylinder bore | d h9 | H | L +0.2 | d ₁ | code |
|------------------------|---------|-----|--------|----------------|---------------|
| 10 | 5 | 3.5 | 4 | 7.5 | C2 1020 N3584 |
| 13 | 7 | 4 | 4.5 | 10 | C2 1055 N3584 |
| 16 | 10 | 4 | 4.5 | 13 | C2 1083 N3584 |
| 18 | 10 | 5.5 | 6 | 14 | C2 1092 N3584 |
| 24 | 16 | 5.5 | 6 | 20 | C2 2030 N3584 |
| 25 | 17 | 5.5 | 6 | 21 | C2 2040 N3584 |
| 30 | 20 | 7 | 7.5 | 25 | C2 3015 N3584 |
| 32 | 22 | 7 | 7.5 | 27 | C2 3030 N3584 |
| 32 | 24 | 5.5 | 6 | 28 | C2 3035 N3584 |
| 35 | 25 | 7 | 7.5 | 30 | C2 3050 N3584 |
| 40 | 30 | 7 | 7.5 | 35 | C2 4005 N3584 |
| 45 | 35 | 7 | 7.5 | 40 | C2 4035 N3584 |
| 45 | 37 | 6 | 6.5 | 41 | C2 4047 N3584 |
| 50 | 36 | 10 | 11 | 43 | C2 5005 N3584 |
| 50 | 40 | 7 | 7.5 | 45 | C2 5010 N3584 |
| 52 | 42 | 7 | 7.5 | 48 | C2 5025 N3584 |
| 55 | 45 | 7 | 7.5 | 50 | C2 5045 N3584 |
| 60 | 50 | 7 | 7.5 | 55 | C2 6010 N3584 |
| 60 | 50 | 10 | 11 | 55 | C2 6011 N3584 |
| 63 | 53 | 7 | 7.5 | 58 | C2 6035 N3584 |
| 65 | 55 | 7 | 7.5 | 60 | C2 6055 N3584 |
| 80 | 68 | 8.5 | 9.5 | 74 | C2 8015 N3584 |
| 85 | 73 | 8.5 | 9.5 | 79 | C2 8045 N3584 |
| 100 | 80 | 15 | 16 | 90 | C2 A010 N3584 |
| 110 | 95 | 10 | 11 | 102.5 | C2 B010 N3584 |
| 120 | 105 | 10 | 11 | 112.5 | C2 C017 N3584 |
| 140 | 125 | 10 | 11 | 132.5 | C2 E020 N3584 |
| 150 | 135 | 10 | 11 | 142.5 | C2 F015 N3584 |
| 220 | 200 | 14 | 15 | 210 | C2 M015 N3584 |