


Parker Seals | Parker E4 piston seal

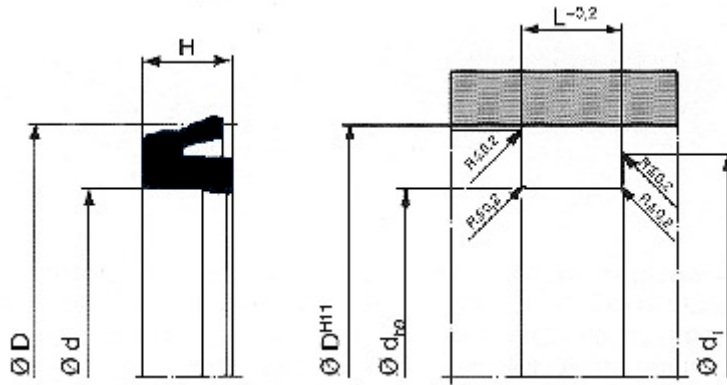

Materiale: N3587

Pressione max. 16 bar.

Temp. di esercizio: -30 +80 °C.

Max. velocità 1 m/sec.



SEAT

| D H11 cylinder bore | d h9 | H | L +0.2 | d ₁ | code |
|------------------------|---------|-----|--------|----------------|---------------|
| 12 | 6 | 4 | 4.5 | 11 | E4 1206 N3578 |
| 12 | 7 | 4 | 4.5 | 11 | E4 1207 N3578 |
| 14 | 8 | 4 | 4.5 | 13 | E4 1408 N3578 |
| 16 | 8 | 5.5 | 6 | 15 | E4 1608 N3578 |
| 16 | 10 | 4 | 4.5 | 15 | E4 1610 N3578 |
| 20 | 12 | 5.5 | 6 | 19 | E4 2012 N3578 |
| 20 | 14 | 4 | 4.5 | 19 | E4 2014 N3578 |
| 22 | 16 | 5 | 5.5 | 21 | E4 2216 N3578 |
| 25 | 17 | 4.5 | 5 | 24 | E4 2516 N3578 |
| 25 | 17 | 5.5 | 6 | 24 | E4 2517 N3578 |
| 28 | 18 | 7 | 7.5 | 26.5 | E4 2818 N3578 |
| 32 | 22 | 7 | 7.5 | 30.5 | E4 3222 N3578 |
| 32 | 24 | 5.5 | 6 | 31 | E4 3224 N3578 |
| 40 | 30 | 7 | 7.5 | 38.5 | E4 4030 N3578 |
| 50 | 40 | 7 | 7.5 | 48.5 | E4 5040 N3578 |
| 60 | 50 | 7 | 7.5 | 58.5 | E4 6022 N3578 |
| 63 | 53 | 7 | 7.5 | 61.5 | E4 6353 N3578 |
| 70 | 58 | 7 | 7.5 | 68 | E4 7058 N3578 |
| 75 | 65 | 7.5 | 8 | 73.5 | E4 7065 N3578 |
| 100 | 88 | 8.5 | 9.5 | 98 | E4 A088 N3578 |
| 110 | 98 | 8.5 | 9.5 | 108 | E4 B002 N3578 |
| 125 | 110 | 10 | 11 | 122.5 | E4 C010 N3578 |
| 160 | 145 | 10 | 11 | 157.5 | E4 G022 N3578 |