


## Elastomer Seals | Piston seal P1R hydraulics



Material: P95-R198 / NBR70.  
 Pression max. 300bar.  
 Temp.: -25 +100°C.  
 Speed max. 0.5m/sec.

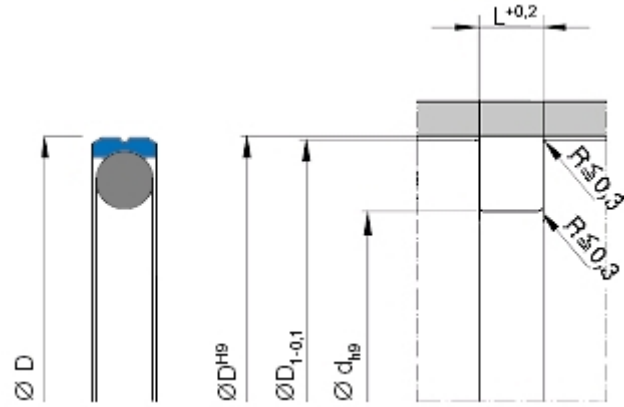

## SEAT

| DIMENSIONS ACCORDING WITH ISO 7425/1    |         |        |                            |
|---|---------|--------|----------------------------|
| D H9 cylinder bore<br>dimensional range | d h9    | L +0.2 | D1 -0.1<br>piston diameter |
| 20 - 40                                 | D - 7.5 | 3.2    | D -0.3                     |
| 30 - 80                                 | D -11.0 | 4.2    | D -0.3                     |
| 40 - 125                                | D -15.5 | 6.3    | D -0.4                     |
| 80 - 200                                | D -21.0 | 8.1    | D -0.5                     |
| 150 - 350                               | D -24.5 | 8.1    | D -0.5                     |
| <b>FURTHER DIMENSIONS UPON REQUEST</b>  |         |        |                            |