


Guarnizioni Parker Seals |Parker C1 tenuta stelo

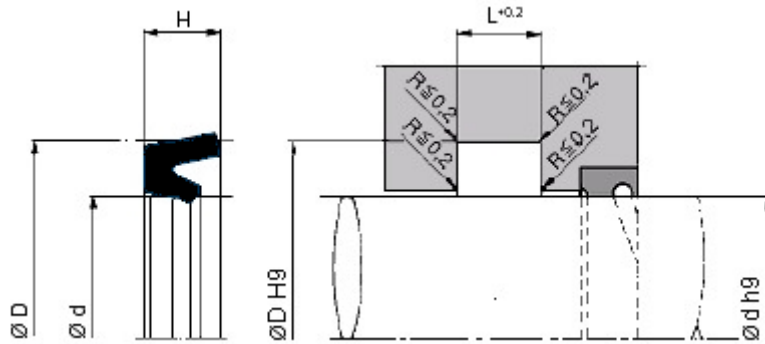

Materiale: N3571

Pressione max. 160 bar. idraulica / 16 bar. pneumatica

Temp. di esercizio: -35 +100 °C. idraulica / -35 +80 °C. pneumatica

Max. velocita' 0.5 m/sec. idraulica / 1 m/sec. pneumatica



SEDI

d f9 stelo	D H9 fondo gola	H ingombro	L +0.2 larghezza gola	codice C1
3	7	3	3.5	C1 0005 N3571
3	9	4.5	5	C1 0009 N3571
3	10	5	5.5	C1 0011 N3571
5	9	2.5	3	C1 0035 N3571
5	12	4.5	5	C1 0041 N3571
6	10	3	3.5	C1 0055 N3571
10	13.6	2.3	2.7	C1 1002 N3571
10	16	4.5	5	C1 1008 N3571
10	18	5.5	6	C1 1015 N3571
11	17	4	4.5	C1 1022 N3571
14	22	5.5	6	C1 1041 N3571
15	22	5	5.5	C1 1044 N3571
16	22.5	4.5	5	C1 1049 N3571
16	23.5	5.5	6	C1 1052 N3571
16	24	5.5	6	C1 1053 N3571
18	25	5.5	6	C1 1063 N3571
18	26	5.5	6	C1 1066 N3571
20	26	4.8	5.3	C1 2005 N3571
22	29	5.5	6	C1 2025 N3571
22	30	5.5	6	C1 2029 N3571
24	32	5.5	6	C1 2043 N3571
25	32	5.5	6	C1 2053 N3571
25	33	5.5	6	C1 2058 N3571
26	36	7	7.5	C1 2078 N3571
28	36	5.5	6	C1 2085 N3571
30	38	5.5	6	C1 3005 N3571
30	38	8	8.5	C1 3010 N3571
30	40	7	7.5	C1 3015 N3571
30	42	8.5	9.5	C1 3020 N3571
32	40	5.5	6	C1 3025 N3571
32	42	7	7.5	C1 3030 N3571
35	43	8	8.5	C1 3045 N3571
36	46	7	7.5	C1 3055 N3571
40	48	8	8.5	C1 4010 N3571
40	50	7	7.5	C1 4015 N3571



44	54	7	7.5	C1 4030 N3571
50	60	7	7.5	C1 5010 N3571
55	65	7	7.5	C1 5040 N3571
56	66	7	7.5	C1 5043 N3571
63	75	8.5	9.5	C1 6035 N3571
65	77	8.5	9.5	C1 6055 N3571
68	80	8.5	9.5	C1 6070 N3571
70	82	8.5	9.5	C1 7003 N3571
80	92	8.5	9.5	C1 8015 N3571
85	97	8.5	9.5	C1 8040 N3571
90	102	8.5	9.5	C1 9015 N3571
100	115	10	11	C1 A015 N3571
105	120	10	11	C1 A051 N3571
110	125	10	11	C1 B015 N3571
120	135	10	11	C1 C015 N3571
150	170	14	15	C1 F020 N3571
210	230	14	15	C1 L040 N3571
260	290	21	22	C1 O010 N3571