


Guarnizioni in elastomero | Tenuta pistone P0R Idrraulica

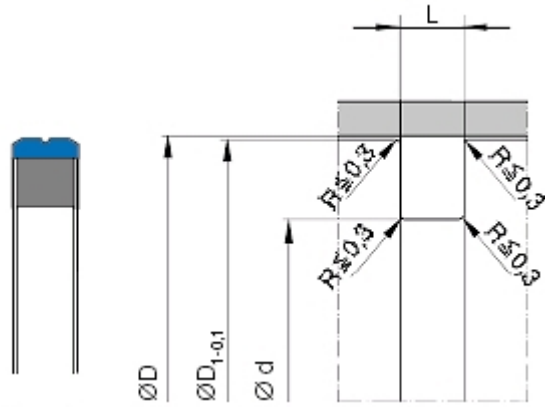


Materiali: quadri ring N85-N116; Slipper P95-R198.
 Pressione max. 300bar.
 Temp. di esercizio: -25 +100°C.
 Velocità max. 0.5m/sec.

SEDI

DIMENSIONI UNIFICATE ISO 7425/1					
D H9	d h9	L +0.2	D1	codice	
20	12.5	3.2	19.7	P0R-0020	
25	17.5	3.2	24.7	P0R-0025	
32	24.5	3.2	31.7	P0R-0032	
40	29	4.2	39.7	P0R-0040	
50	39	4.2	49.7	P0R-0050	
60	49	4.2	59.7	P0R-0060	
63	52	4.2	62.7	P0R-0063	
70	59	4.2	69.7	P0R-0070	
80	64.5	6.3	79.6	P0R-0080	
90	74.5	6.3	89.6	P0R-0090	
100	84.5	6.3	99.6	P0R-0100	
125	109.5	6.3	124.6	P0R-0125	
140	119	8.1	139.5	P0R-2140	
160	139	8.1	159.5	P0R-0160	
180	159	8.1	179.5	P0R-0180	
200	179	8.1	199.5	P0R-0200	

ALTRI ALLOGGIAMENTI a SEZIONE ISO7425/1

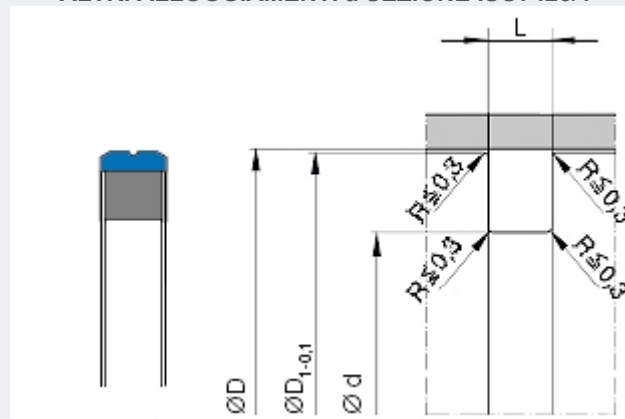

D H9 alesaggio
campo dimensionale

d h9
fondo gola

L +0.2
larghezza gola

D1 -0.1
diametro pistone

20 - 40

D -7.5

3.2

D - 0.3

30 - 80

D -11

4.2

D -0.3

40 - 125

D -15.5

6.3

D -0.4

80 - 200

D -21

8.1

D -0.5

100 - 200

D -21

10.5

D-0.5

150 - 400

D -25

12.5

D -0.5

ULTERIORI ALLOGGIAMENTI FORNIBILI A RICHIESTA

