


## Guarnizioni Parker Seals | Parker B7 tenuta pistone

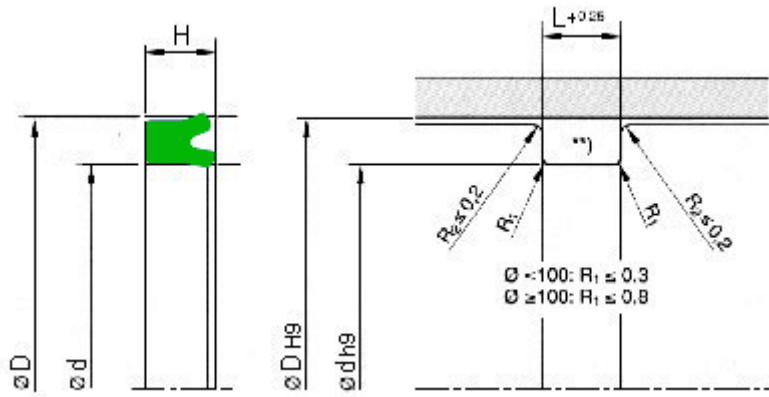

Materiale: P5008

Pressione max. 400 bar.

Temp. di esercizio:  $-35 +110$  °C.

Max. velocità 0.5 m/sec.



## SEDI

D H9 alesaggio	d h9	H	L +0.25	codice
16	8	5.7	6.3	B7 1608 P5008
20	12	5.7	6.3	B7 2012 P5008
24	16	5.7	6.3	B7 2416 P5008
28	20	7	8	B7 2810 P5008
32	24	5.7	6.3	B7 3224 P5008
32	25	5	5.6	B7 3226 P5008
35	25	7.3	8	B7 3525 P5008
40	28	10	11	B7 4018 P5008
40	33	8	9	B7 4033 P5008
50	40	7.3	8	B7 5040 P5008
52	42	7.3	8	B7 5209 P5008
60	50	7.3	8	B7 6050 P5008
63	53	7.3	8	B7 6353 P5008
70	60	12	13	B7 7012 P5008
75	63	8.7	9.5	B7 7027 P5008
80	70	6.7	7.5	B7 8010 P5008
100	85	11.4	12.5	B7 A085 P5008